



# SodaStream Source External Disassembly

Prerequisite Only

Written By: Hailey Smith






## TOOLS:



- [Phillips #1 Screwdriver](#) (1)
-

## Step 1 — SodaStream Source External Disassembly

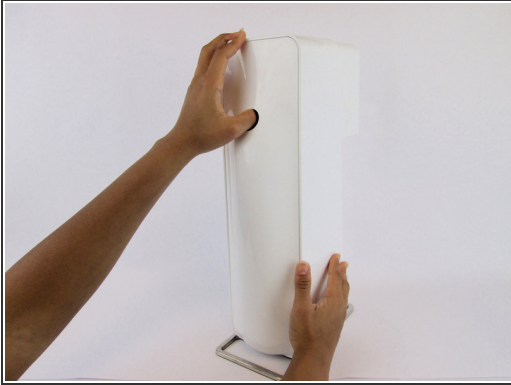

- Remove the soda bottle and the CO2 canister from the machine.


## Step 2

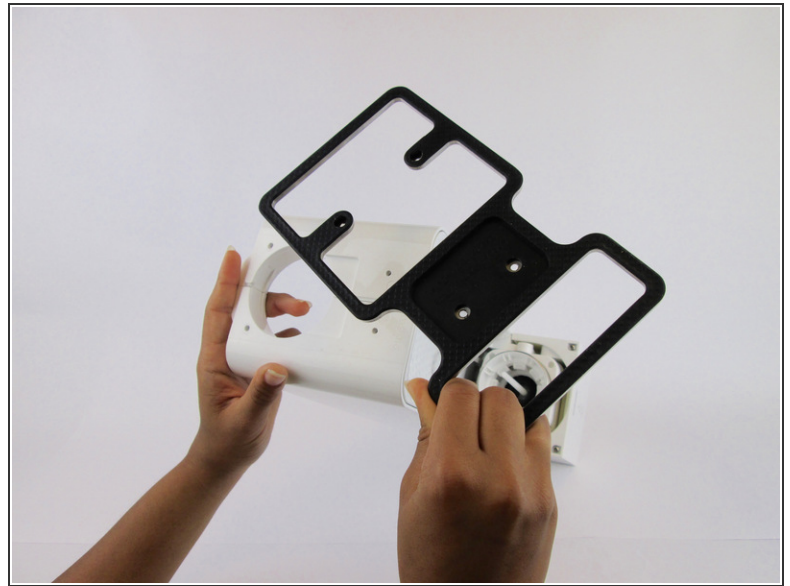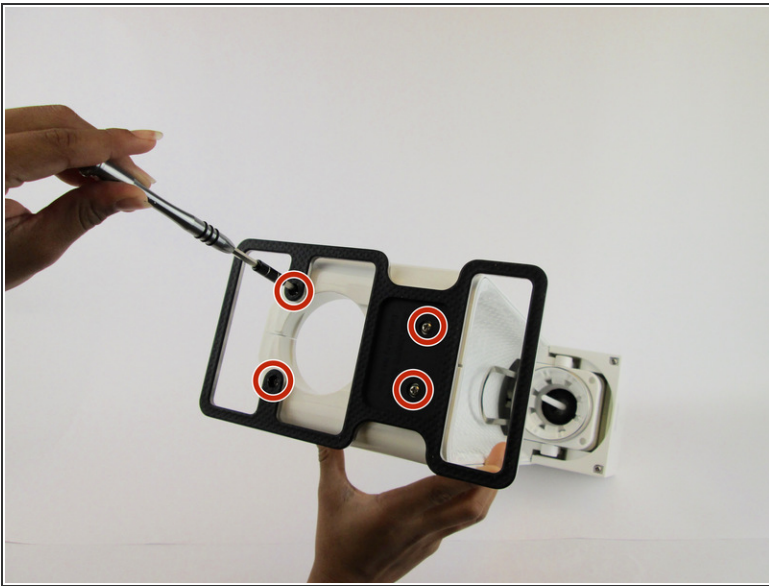

- Remove the four 17.8 mm screw from the bottom metal base using a [Phillips #1 screwdriver](#).




## Step 3

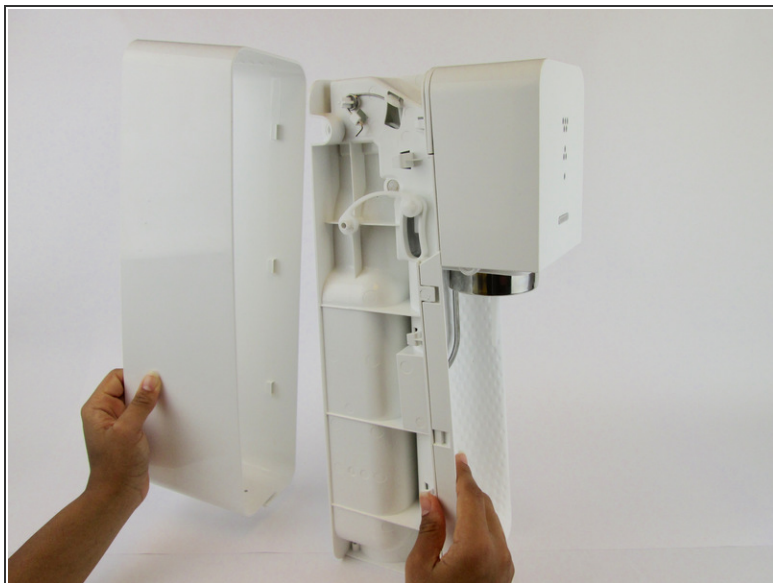



- Pull the outer cover away from the front of the device.

## Step 4

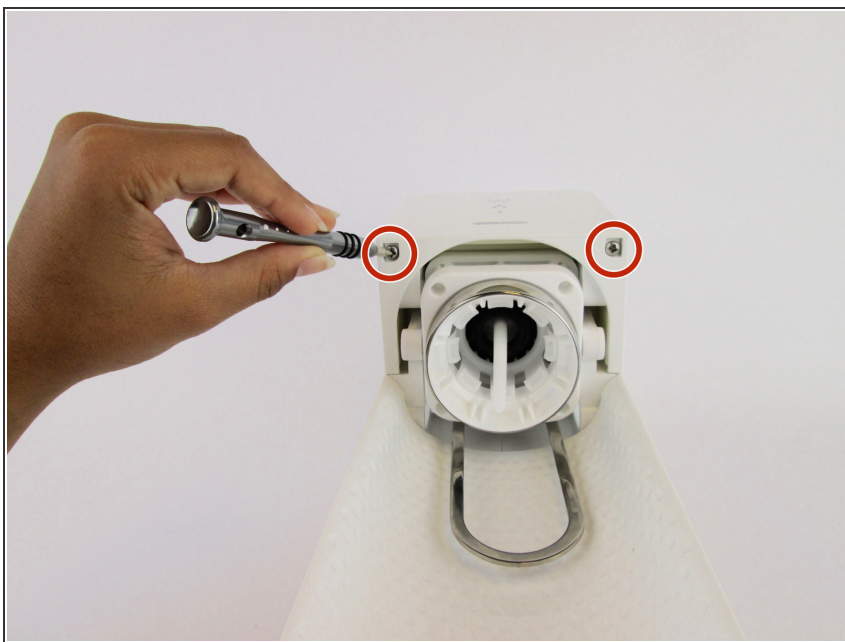

- Remove the two 18.2 mm screws from the bottom of the front cover using a [Phillips #1 screwdriver](#).

## Step 5

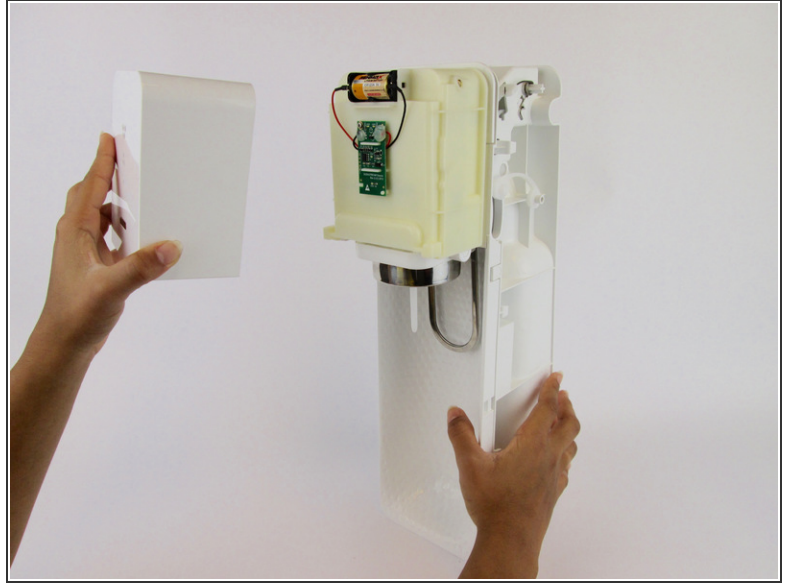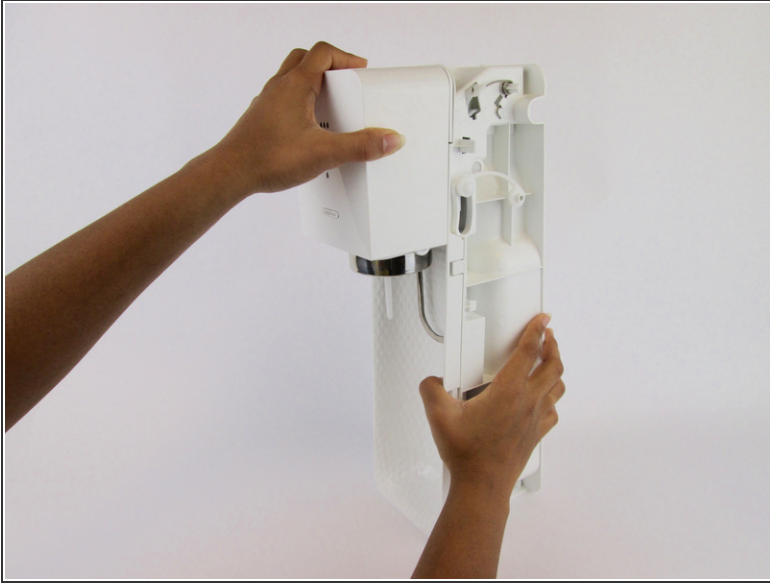

- Firmly pull the front cover off.
- ⓘ This piece is difficult to remove and requires force.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-06-25 07:38:13 PM.